


FEUIL1803

02.2025


Sanifos

- FR** • Feuillet technique
- EN** • Data booklet
- DE** • Datenheft
- ES** • Ficha de datos técnicos
- IT** • Scheda tecnica
- NL** • Technische gegevensblad
- PT** • Ficha de dados técnicos
- PL** • Arkusz danych technicznych
- NO** • Teknisk datablad
- RO** • Broşura de date
- HU** • Műszaki adatlap
- VI** • Thông tin kỹ thuật

SANIFOS 110



Étendue de la fourniture - Scope of supply- Lieferumfang - Elementes suministrados - Oggetto della fornitura - Âmbito do fornecimento - Leveringsomvang - Zakres dostawy - Leveransens innehåll - Lista de piese furnizate - A szállított alkatrészek listája - Kiện hàng

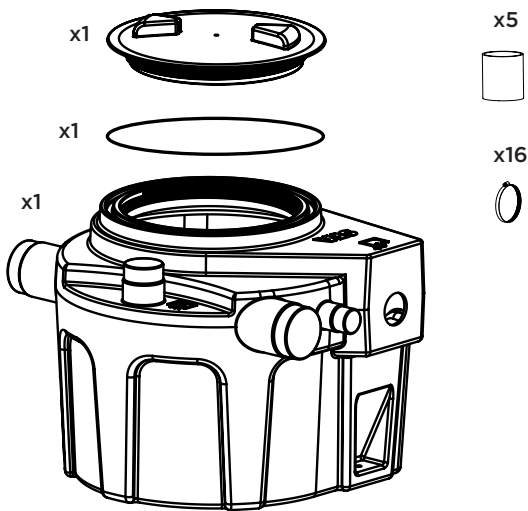


A

Sanipump GR

x1



x1




x1




B

Sanipump ZPK 40 AV

x1



x1




x1



Caractéristiques techniques - Technical data - Technische Daten - Datos técnicos - Caratteristiche tecniche - Dados técnicos - Technische gegevens - Technické údaje - Informacje techniczne - Tehniska data - Date tehnice - Műszaki adatok - Thông số kỹ thuật

A


H (m)

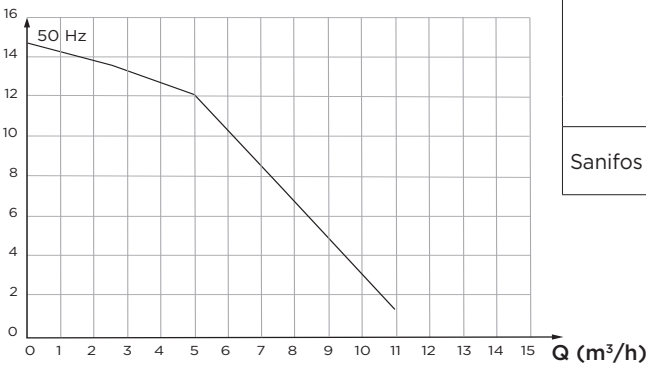

	~ (V)	P 1 (W)	Q max (m³/h)	H max (m)	I (A)	 Kg (kg)	 OFF (mm) ±10 mm	ON
Sanifos 110 1 GR SP S	1~ 230	1500	15	14	6	40	120	320

B

H (m)




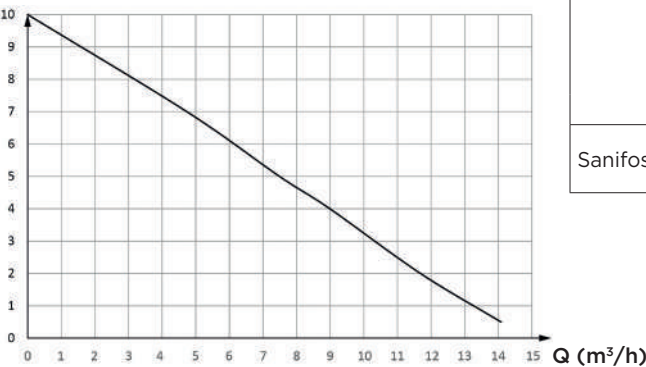


	~ (V)	P 1 (W)	Q max (m³/h)	H max (m)	I (A)	 Kg (kg)	 OFF (mm) ±10 mm	ON
Sanifos 110 ZPK 40 AV	1~ 230	850	14	10	3,7	33,6	100- 180	200- 240


SANIFOS 280




Étendue de la fourniture - Scope of supply- Lieferumfang - Elementes suministrados - Oggetto della fornitura - Âmbito do fornecimento - Leveringsomvang - Zakres dostawy - Leveransens innehåll - Lista de piese furnizate - A szállított alkatrészek listája - Kiên hàng

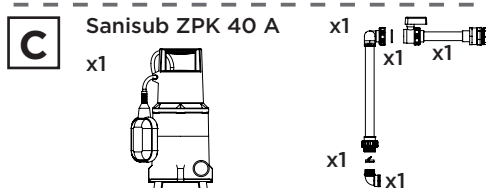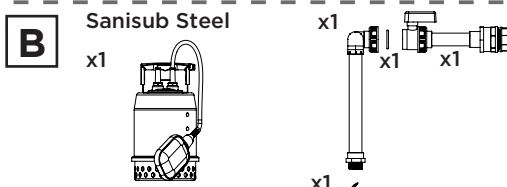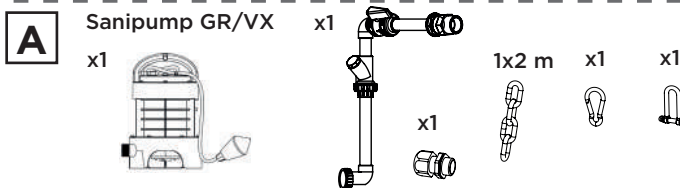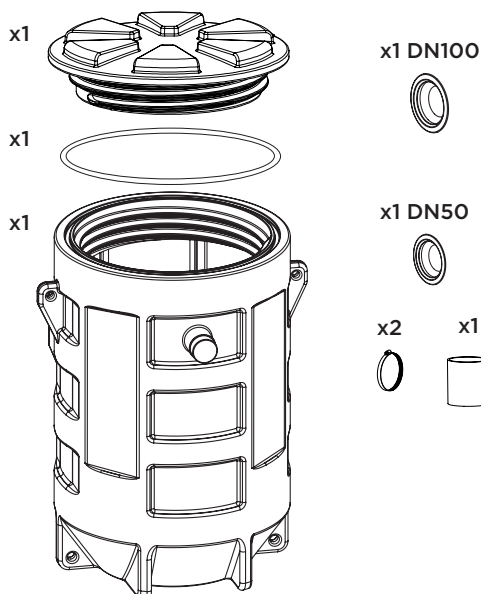


Caractéristiques techniques - Technical data - Technische Daten - Datos técnicos - Caratteristiche tecniche - Dados técnicos -
Technische gegevens - Technické údaje - Informacje techniczne - Tehniska data - Date tehnice - Műszaki adatok - Thông số kỹ thuật

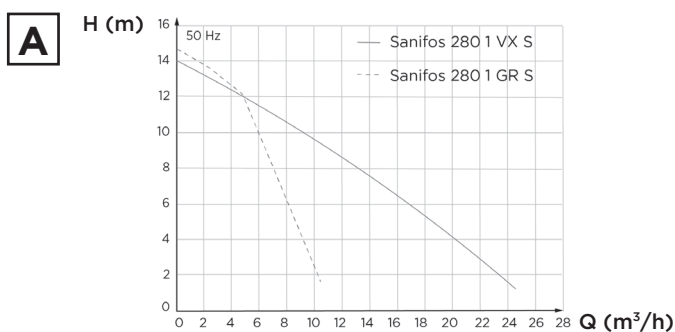

	~ (V)	P 1 (W)	Q max (m³/h)	H max (m)	I (A)	 (kg)	 (mm) ±10 mm	
							OFF	ON
Sanifos 280 1 GR SP S	1~ 230	1500	15	14	6	55	120	320
Sanifos 280 1 VX SP S	1~ 230	1 500	26	13	6	55	140	340

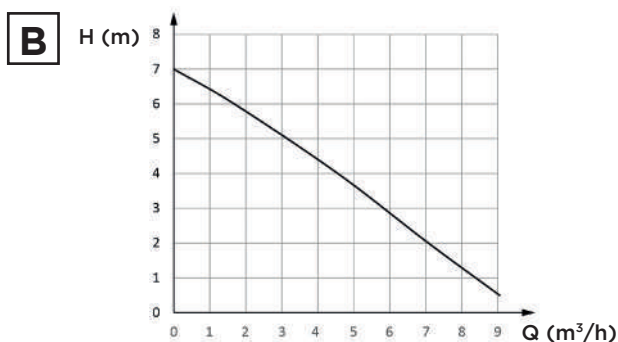


	~ (V)	P 1 (W)	Q max (m³/h)	H max (m)	I (A)	 (kg)	 (mm) ±10 mm	
							OFF	ON
Sanifos 280 Steel	1~ 230	450	9	7	2	46,5	110	360

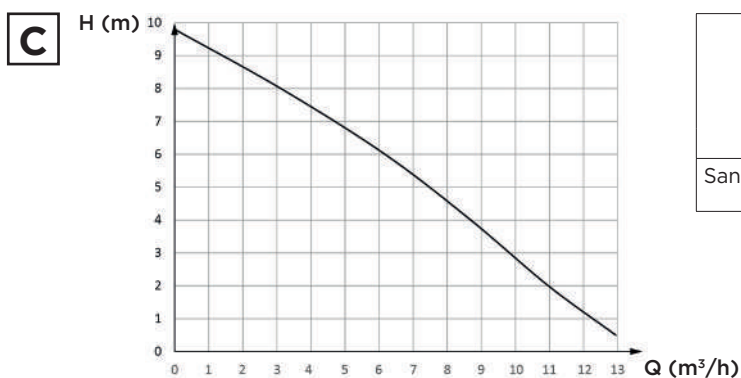

	~ (V)	P 1 (W)	Q max (m³/h)	H max (m)	I (A)	 (kg)	 (mm) ±10 mm	
							OFF	ON
Sanifos 280 ZPK 40 A	1~ 230	850	13	10	3,7	48,6	250	400

SANIFOS 390



Étendue de la fourniture - Scope of supply- Lieferumfang - Elementes suministrados - Oggetto della fornitura - Âmbito do fornecimento - Leveringsomvang - Zakres dostawy - Leveransens innehåll - Lista de piese furnizate - A szállított alkatrészek listája - Kiện hàng



x1



x1


x1 DN100



x1 DN75



x1 DN50

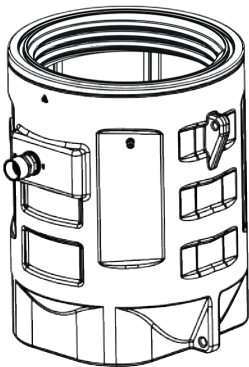


x1

+ hydraulique pré-montée, flotteur(s) - pre-assembled hydraulic, float(s) - vormontierte Hydraulik, Schwimmer(n) - Accesorios hidráulicos preinstalados, flotador(es) - Sistema hidráulico pré-montado, flutuador(es) - Hydraulica voorgemonteerd, vlotter - Idraulica premontata, galleggiante(i)


A

Sanipump GR/VX

x1



x1



1x 2m



x1



x1



x1



x1



x1




x1




B

Sanipump GR/VX

x2



x2



1x 2m



x1



x2



x1



RD : x3



RD : x1



3xPG11, 2xPG13

RD : 1xPG11, 3xPG13



x1



x1



RD

x1



x1



C

Sanipump SLD

x1



x1



1x 2m



x1



x1



x1



x1




x1



D

Sanipump SLD

x2



x2



1x 2m



x1



x2



x1



RD : x3



RD : x1



3xPG11, 2xPG13

RD : 1xPG11, 3xPG13



x1



x1



RD

x1




x1






Caractéristiques techniques - Technical data - Technische Daten - Datos técnicos - Caratteristiche tecniche - Dados técnicos - Technische gegevens - Technické údaje - Informacje techniczne - Tehniska data - Date tehnice - Műszaki adatok - Thông số kỹ thuật

A B

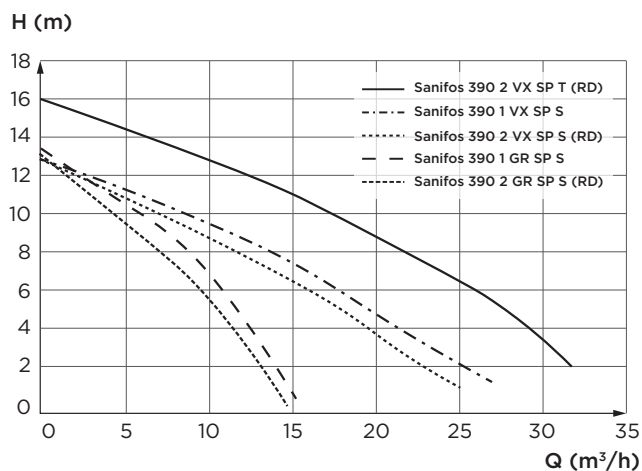

	~ (V)	P 1 (W)	Q max (m³/h)	H max (m)	I (A)	 (kg)	Niveau - Level - Stand- Nivel - Livello - Nivel (mm) ±10 mm	
							OFF	ON
Sanifos 390 1 GR SP S	1~ 230	1500	15	13	6	45	170	350
Sanifos 390 1 VX SP S	1~ 230	1500	27	13	6	50	180	360
Sanifos 390 2 GR SP S	1~ 230	1500	15	13	6	65	90*	390
Sanifos 390 2 GR SP S RD							160	400
Sanifos 390 2 VX SP S	1~ 230	1500	25	13	6	70	160	390
Sanifos 390 2 VX SP S RD							160	400
Sanifos 390 2 VX SP T	3~ 400	2800	32	16	6	70	160	390
Sanifos 390 2 VX SP T RD							160	400


C D

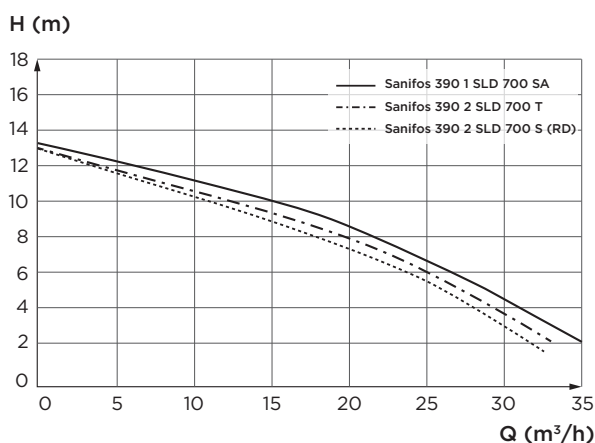


	~ (V)	P 1 (W)	Q max (m³/h)	H max (m)	I (A)	 (kg)	Niveau - Level - Stand- Nivel - Livello - Nivel (mm) ±10 mm	
							OFF	ON
Sanifos 390 1 SLD 700 SA	1~ 230	2000	35	13	9,2	70	140 min.	500
Sanifos 390 2 SLD 700 S	1~ 230	2000	32	13	9,2	110	180	400
Sanifos 390 2 SLD 700 S RD							160	400
Sanifos 390 2 SLD 700 T	3~ 400	2000	33	13	3,3	110	180	400
Sanifos 390 2 SLD 700 T RD							160	400

* avec délai retard, with stop delay, mit Pumpennachlaufzeit, con tiempo de retraso, con tempo di ritardo, met pompvertraging, com tempo de atraso


SANIFOS 610




Étendue de la fourniture - Scope of supply- Lieferumfang - Elementes suministrados - Oggetto della fornitura - Âmbito do fornecimento - Leveringsomvang - Zakres dostawy - Leveransens innehåll - Lista de piese furnizate - A szállított alkatrészek listája - Kiện hàng

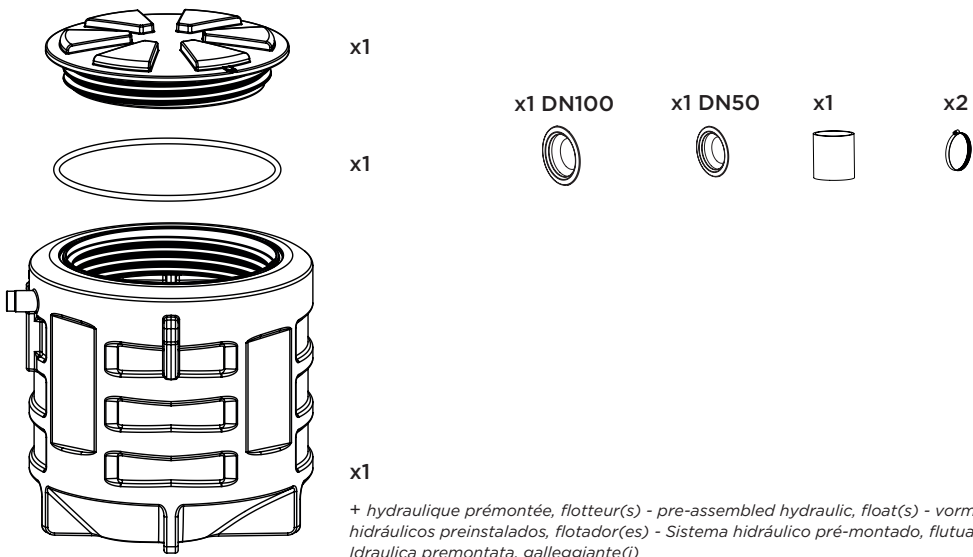


A Sanipump GR/VX

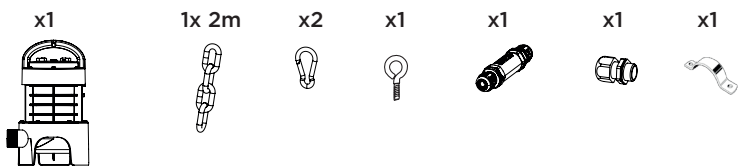


B Sanipump GR/VX

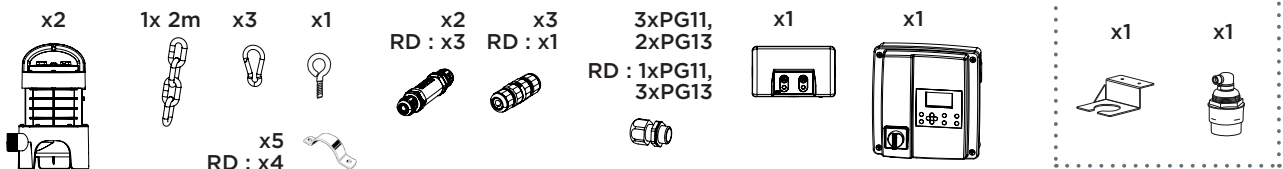

C Sanipump SLD

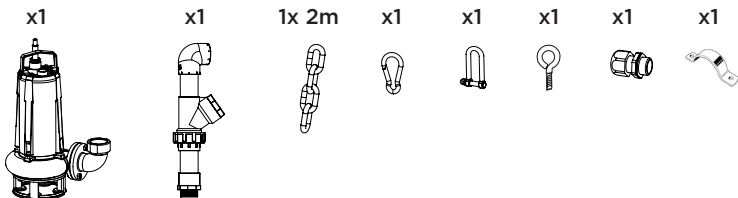


D Sanipump SLD

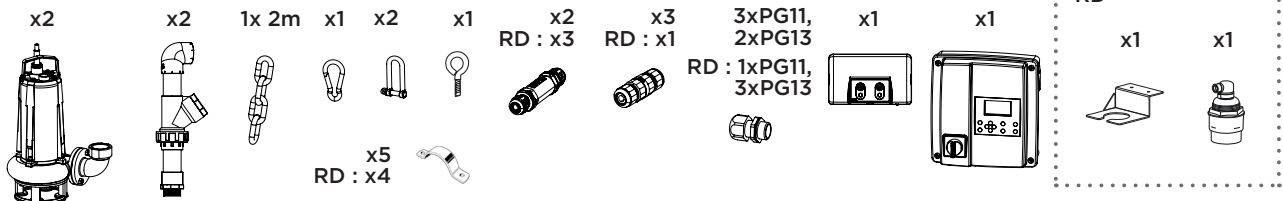




Caractéristiques techniques - Technical data - Technische Daten - Datos técnicos - Caratteristiche tecniche - Dados técnicos - Technische gegevens - Technické údaje - Informacje techniczne - Tehniska data - Date tehnice - Műszaki adatok - Thông số kỹ thuật

A B

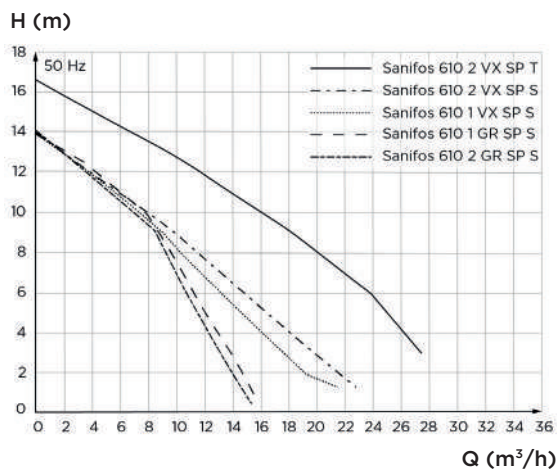

	~ (V)	P 1 (W)	Q max (m³/h)	H max (m)	I (A)	Kg (kg)	Niveau - Level - Stand- Nivel - Livello - Nivel (mm) ±10 mm	
							OFF	ON
Sanifos 610 1 GR SP S	1~ 230	1 500	16	14	6	100	140	340
Sanifos 610 1 VX SP S	1~ 230	1 500	21	14	6	100	160	360
Sanifos 610 2 GR SP S	1~ 230	1 500	16	14	6	115	90*	390
Sanifos 610 2 GR SP S RD							160	400
Sanifos 610 2 VX SP S	1~ 230	1 500	23	14	6	115	160	390
Sanifos 610 2 VX SP S RD							160	400
Sanifos 610 2 VX SP T	3~ 400	2 800	28	16,7	6	115	160	390
Sanifos 610 2 VX SP T RD							160	400

C D

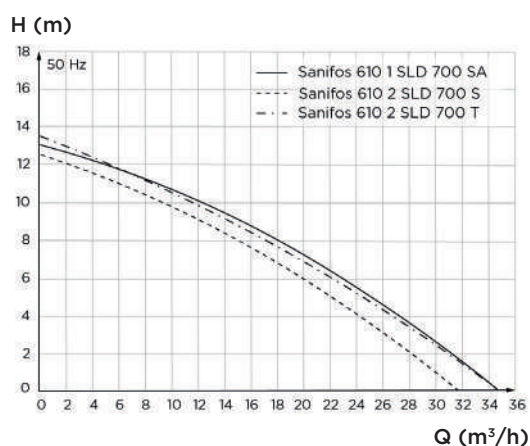


	~ (V)	P 1 (W)	Q max (m³/h)	H max (m)	I (A)	Kg (kg)	Niveau - Level - Stand- Nivel - Livello - Nivel (mm) ±10 mm	
							OFF	ON
Sanifos 610 1 SLD 700 SA	1~ 230	1100	35	13,5	9,2	85	140 min.	500
Sanifos 610 2 SLD 700 S	1~ 230	1100	32	13	9,2	120	150	400
Sanifos 610 2 SLD 700 S RD							160	400
Sanifos 610 2 SLD 700 T	3~ 400	1100	35	13,7	6	120	150	400
Sanifos 610 2 SLD 700 T RD							160	400

* avec délai retard, with stop delay, mit Pumpennachlaufzeit, con tiempo de retraso, con tempo di ritardo, met pompvertraging, com tempo de atraso


SANIFOS 1300



Étendue de la fourniture - Scope of supply- Lieferumfang - Elementes suministrados - Oggetto della fornitura - Âmbito do fornecimento - Leveringsomvang - Zakres dostawy - Leveransens innehåll - Lista de piese furnizate - A szállított alkatrészek listája - Kiện hàng

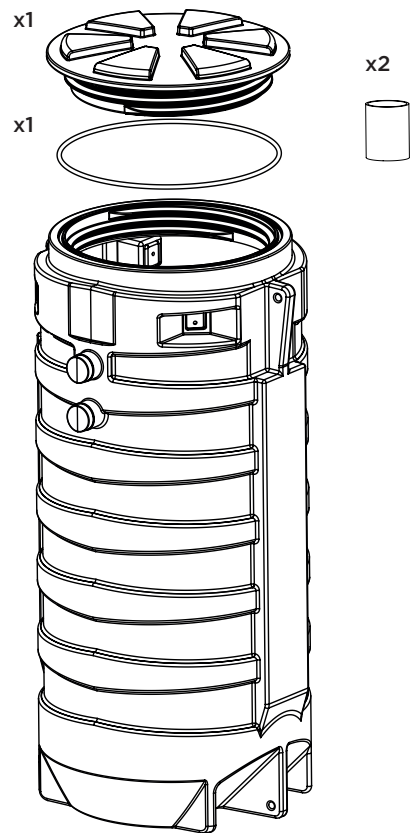


A Sanipump GR/ Sanipump VX

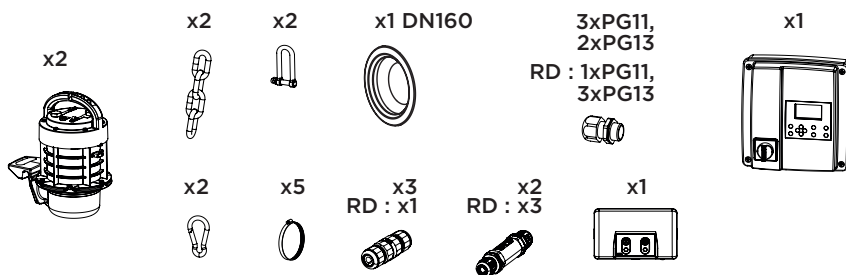


+ hydraulique pré-montée, rail, flotteur(s) - with pre-assembled hydraulic, stainless steel guide bars and float(s)
- vormontierte Hydraulik, Führungsschienen aus Edelstahl, Schwimmer(n) - Accesorios hidráulicos preinstalados, barras de guía, flotador(es) - Sistema hidráulico pré-montado, barras de guia inox, flutuador(es) - Hydraulica voorge-monteerd, geleiderail en vlotter - Idraulica premontata, barre di guida, galleggiante(i)


B Sanisub Steel

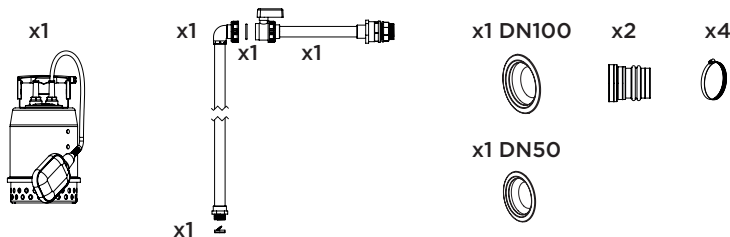

Caractéristiques techniques - Technical data - Technische Daten - Datos técnicos - Caratteristiche tecniche - Dados técnicos - Technische gegevens - Technické údaje - Informacje techniczne - Tehniska data - Date tehnice - Műszaki adatok - Thông số kỹ thuật

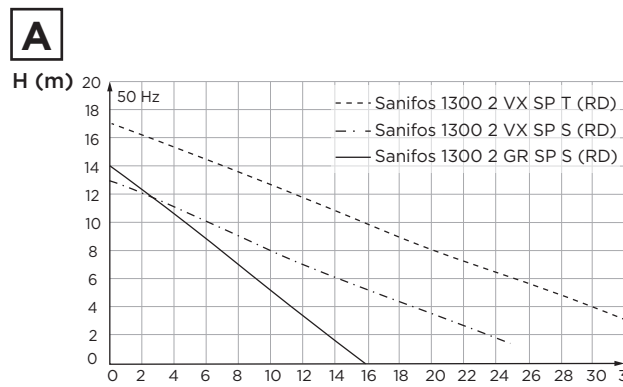

	~ (V)	P 1 (W)	Q max (m³/h)	H max (m)	I (A)	 Kg (kg)	Niveau - Level - Stand- Nivel - Livello - Nível (mm) ±10 mm	
							OFF	ON
2 Sanipump GR S	1~	1500	16	14	6	138	200	600
2 Sanipump GR S RD	230							
2 Sanipump VX S	1~	1500	25	13	6	138	200	600
2 Sanipump VX S RD	230							
2 Sanipump VX T	3~	2800	33	17	7	138	200	600
2 Sanipump VX T RD	400							

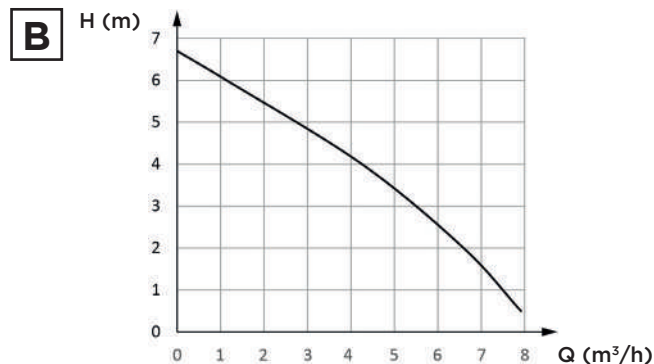

	~ (V)	P 1 (W)	Q max (m³/h)	H max (m)	I (A)	 Kg (kg)	Niveau - Level - Stand- Nivel - Livello - Nível (mm) ±10 mm	
							OFF	ON
1 Sanisub Steel	230	450	8	7	2	90	140	360